
Skydeck USA


SD-AD Joist Adapter Head

Snap-in joist adapter heads provide a fastening point for securing joists to all adjustable pedestals: SD-XXS through SD-XL. The slotted upright allows screw attachment to help prevent sideways movement of the joist.

TECHNICAL DATA

Overall height	1.30 in
Overall length x width	2.76 x 2.56 in
Minimum joist height	1.02 in
Weight (approx.)	0.35 oz (0.022 lb)
Attachment to pedestal	Press-fit
Fire resistance	Class E
Temperature range	-22°F to 149°F
Color	Black
Material	Recycled polypropylene
Recycled content	100%
Packaging	25 pieces per bag

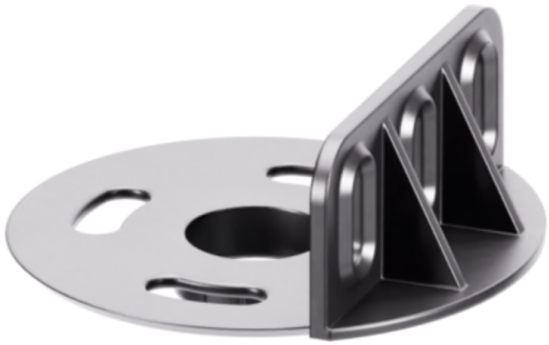

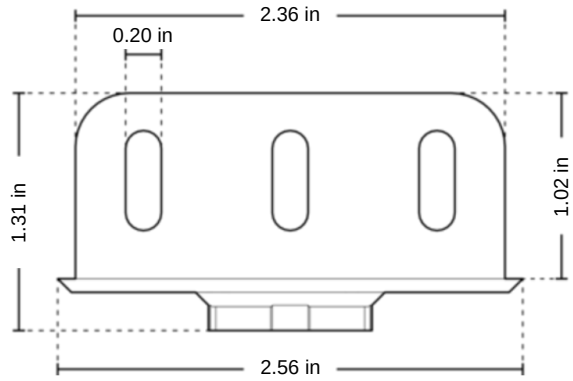

USES

1. Secures joists to compatible pedestal heads
2. Helps prevent sideways joist movement
3. Provides slotted holes for screw attachment

COMPATIBLE JOIST MATERIALS

Hardwood joists
Softwood joists
Aluminum joists
Wood-plastic composite (WPC) joists

INSTALLATION

1. The joist adapter is compatible with all adjustable pedestals: SD-XXS through SD-XL. Use joists at least 1.02 inches high. Lay out pedestal supports to suit the joist system and project requirements.
2. Align the adapter with the receiving holes in the pedestal head. Press firmly into place until the adapter is fully seated.
3. Position the joist against the upright flange and align it with the required deck framing layout.
4. Secure the joist through the slotted holes using screws appropriate for the joist material and project requirements.
5. Adjust pedestal heights, check joist level and alignment, and confirm that the connections are secure before installing decking. Keep drainage paths clear.