Skydeck USA


SD-Wall Clip

The SD-Wall Clip creates a perimeter expansion gap between pavers and a wall or edge restraint, helping keep the edge pavers in position. Compatible with all Skydeck adjustable pedestals, SD-XXS through SD-XL.

TECHNICAL DATA

Compatible pedestals	SD-XXS through SD-XL
Overall length	7.44 in
Overall width	3.94 in
Overall height (approx.)	1 in
Weight (approx.)	1.76 oz (0.110 lb)
Fire resistance	Class E
Temperature range	-22°F to 149°F
Material / color	Recycled polypropylene / black
Recycled content	100%
Packaging	125 pieces per box



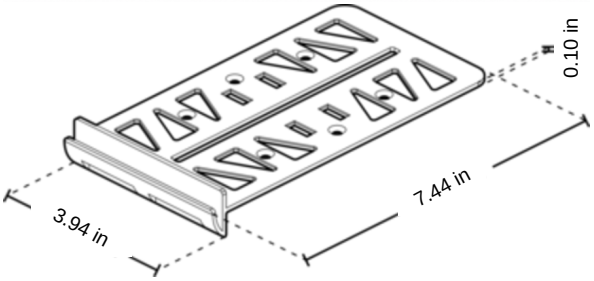

USES

1. Creates a perimeter expansion gap
2. Helps keep edge pavers in position
3. Separates pavers from walls and restraints

SUPPORTED APPLICATIONS

Concrete pavers
Natural stone pavers
Porcelain pavers
Wood deck tiles

INSTALLATION

1. Use with any Skydeck adjustable pedestal, SD-XXS through SD-XL. Position the perimeter pedestals on a stable, load-bearing substrate.
2. Place the clip on the pedestal head, beneath the leveling or sound-dampening shim where used.
3. Orient the raised bumper toward the wall or edge restraint and position the clip to maintain the required perimeter gap.
4. Place the edge paver over the clip. Check that the paver is fully supported, level and stable, and that the perimeter gap remains open.
5. Keep the gap clear of debris to allow drainage and prevent prolonged moisture contact at the wall. Check perimeter stability during routine maintenance.