
Skydeck USA

SD-XL-EXT 8-inch Height Extender

The SD-XL-EXT height extender adds a nominal 8 inches to the SD-XL adjustable pedestal. Compatible with the SD-XL adjustable pedestal only. Its reinforced, threaded design provides additional clearance for raised paver and joist-supported deck installations.

TECHNICAL DATA

Added height (nominal)	8 in
Overall component height	8.86 in
Overall width / depth	5.67 in
Connection	Threaded
Weight (approx.)	13.40 oz (0.838 lb)
Component load capacity	3,307 lb
Fire resistance	Class E
Temperature range	-22°F to 149°F
Recycled content	0%
Packaging	30 pieces per box

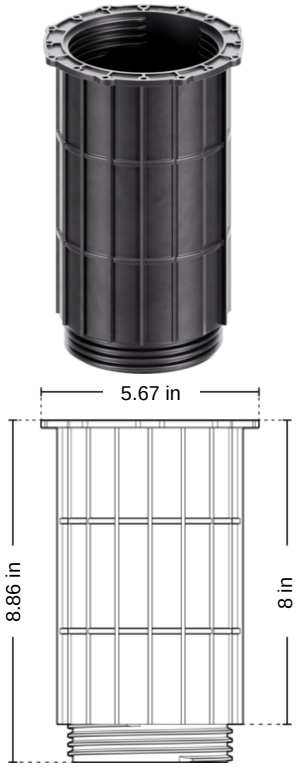

USES

1. Increases pedestal assembly height
2. Provides clearance below raised decks
3. For paver and joist-supported applications

SUPPORTED APPLICATIONS

Concrete pavers
Natural stone pavers
Porcelain pavers
Wood joist systems
Aluminum joist systems
WPC joist systems

INSTALLATION

1. Compatible with the SD-XL adjustable pedestal only. Prepare a clean, stable, load-bearing substrate and position the SD-XL pedestal at the specified support points.
2. Install the extender at the compatible threaded connection. Ensure the threads engage correctly and the connection is fully seated.
3. Adjust the pedestal to the required finished height. Check that the complete assembly is stable and properly supported.
4. Install the appropriate paver or joist support head. Place the flooring system and verify level, support and drainage.
5. Provide required perimeter restraint. For tall assemblies on sloped substrates, use an appropriate base slope corrector and confirm overall system stability.